



**SKY TIGER - SKYLARK
FALCON - EAGLET - CUB
WING SERVO MOUNT HOUSING
BUILD MANUAL**

PREFACE

THANK YOU FOR PURCHASING YOUR NEW WILLYNILLIES.COM WING SERVO MOUNT HOUSINGS. THESE HOUSINGS WERE SPECIFICALLY DESIGNED TO BE USED WITH EMAX ES9251 SERVOS, AVAILABLE FOR PURCHASE AT WILLYNILLIES.COM. THE HOUSINGS ARE QUICK AND EASY TO PREPARE FOR USE, TO INSTALL AND TO REMOVE FOR SERVO REPLACEMENT.

TWO VERSIONS WILL BE AVAILABLE, CLEAR AND OPAQUE WHITE. WHITE CAN BE PAINTED TO MATCH WING COVERING. CLEAR CAN BE DYED TO MATCH TRANSPARENT WING COVERING OR LEFT AS IS.

READ THROUGH THIS MANUAL, TAKE YOUR TIME, AND YOU WILL HAVE AN ENJOYABLE BUILD, A BEAUTIFUL FINAL PRODUCT, AND A SUPER SIMPLE NEW WAY TO MOUNT SERVOS USING YOUR NEW WILLYNILLIES.COM WING SERVO MOUNT HOUSINGS.

BE SURE TO LOOK FOR OUR OTHER ACCESSORIES, AND PLEASE GIVE US YOUR FEEDBACK AT WILLYNILLIES.COM.



REQUIRED SUPPLIES

- MEDIUM CA
- HOBBY KNIFE
- PENCIL
- 400 WET/DRY SAND PAPER
- ROTARY TOOL AND ACCESSORIES
- PLIERS



CONTENTS OF KIT

(CLEAR OR WHITE)

- (1) LEFT SIDE WING SERVO MOUNT HOUSING
- (1) RIGHT SIDE WING SERVO MOUNT HOUSING
- (2) SERVO MOUNTS



MARK VISUAL PARTING LINE IN GROOVE
AROUND ENTIRE PART WITH PENCIL.



USING A NEW BLADE, CUT ON PENCIL
LINE WITH HOBBY KNIFE.



1. ATTACH FULL SHEET OF 400 WET/DRY SANDPAPER TO FLAT SURFACE.
2. WET SAND WITH LIGHT PRESSURE AND LONG STROKES.
3. CHECK OFTEN TO ENSURE EVEN REMOVAL.



WET SAND MOUNTING FLANGE TO A FLAT EVEN SURFACE.



WET SAND PROTRUSION OFF FOR SERVO WIRE EXIT.



WET SAND PROTRUSION OFF FOR SERVO OPENING.




WET SAND HOUSING EDGES TO A SMOOTH UNIFORM FINISH.




WET SAND FRONT OF HOUSING TO FIT BETWEEN
UPPER AND LOWER SPARS. DO NOT FORCE FIT.
DO NOT OVER SAND. THE HOUSING SHOULD NOT BE LOOSE.




WET SAND PROTRUSION OFF FOR SERVO WIRE EXIT.

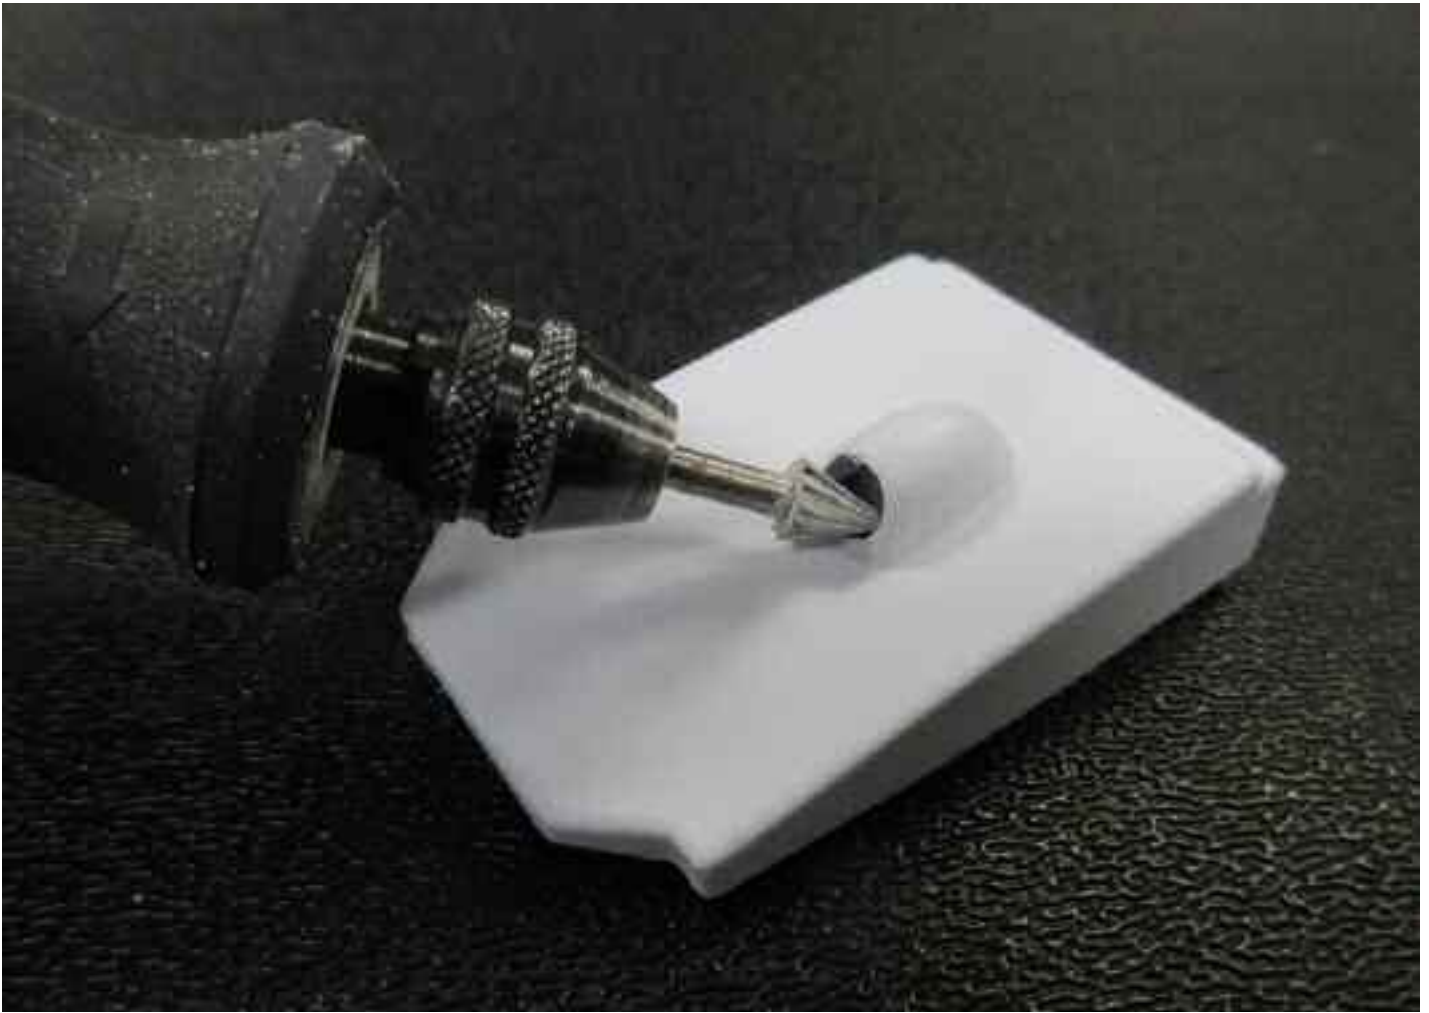

OPEN CONTROL ROD EXIT WITH ROTARY TOOL.

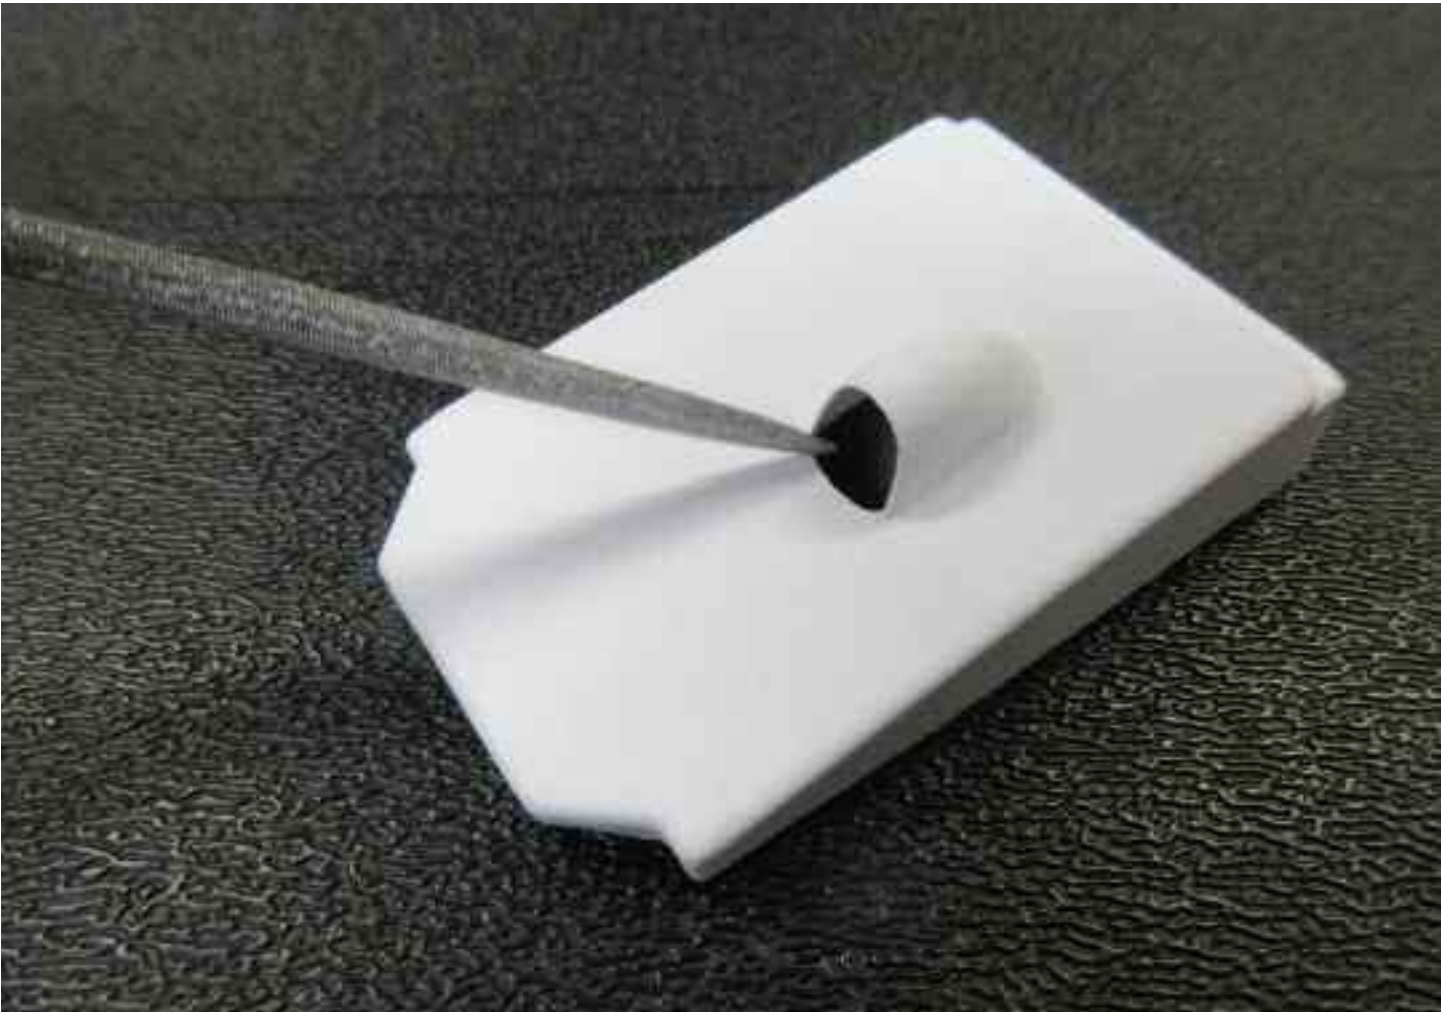

FINISH DETAILS WITH NEEDLE FILES.

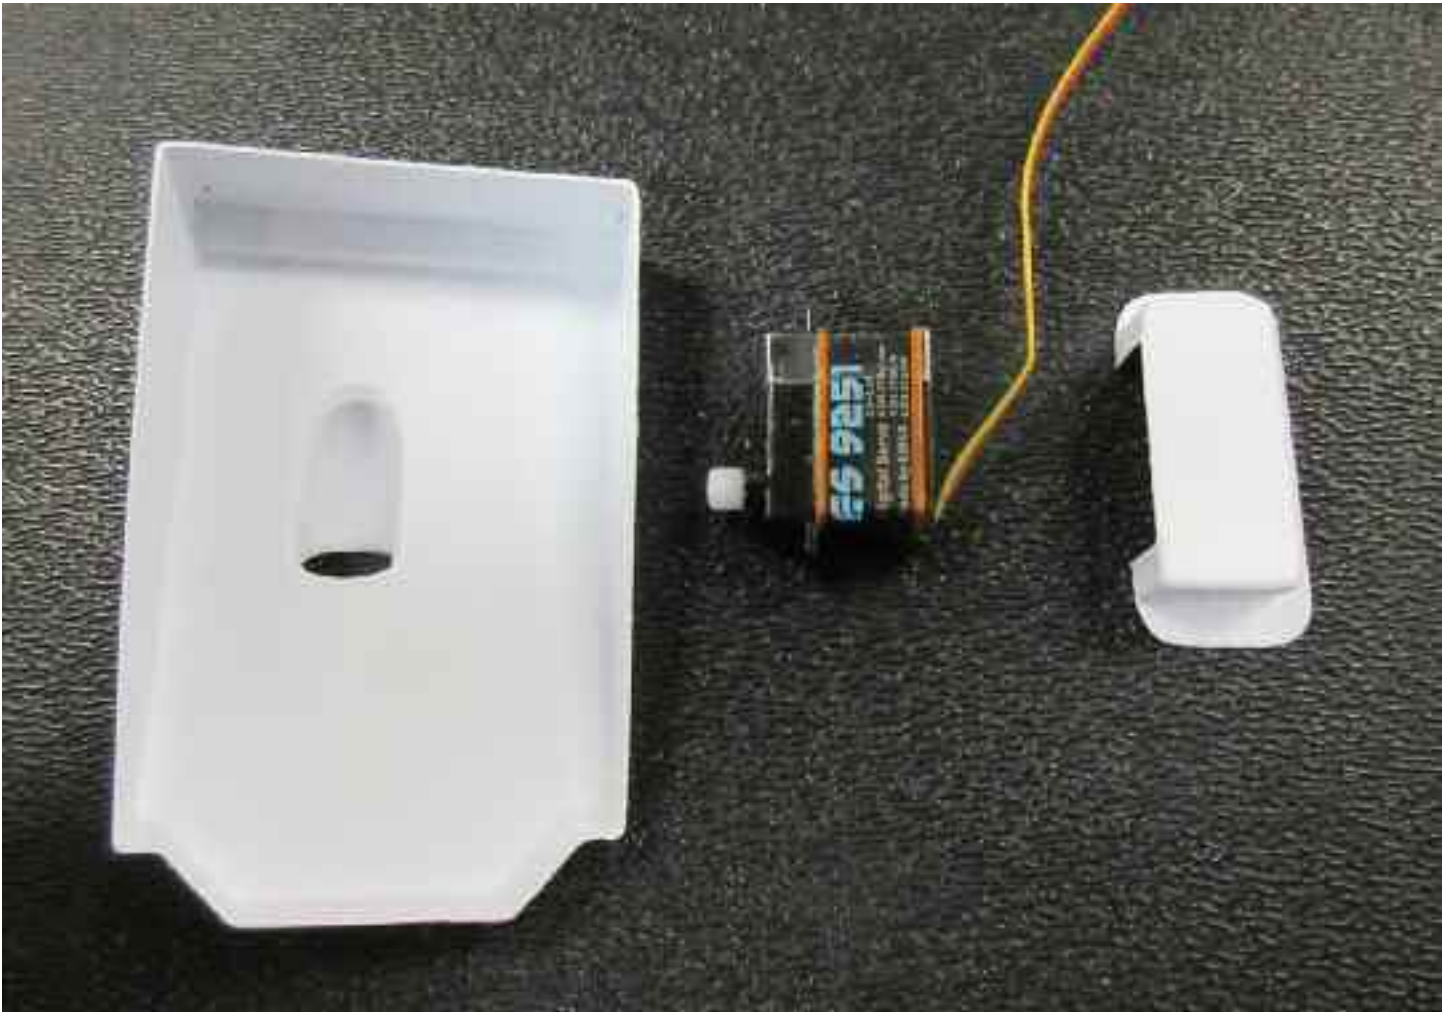


PROPER ORIENTATION FOR RIGHT WING.
LEFT WING WILL BE A MIRROR IMAGE.



FLATTEN SERVO WIRES TO EXIT BOTTOM OF MOUNT.




ROUTE SERVO WIRE THROUGH BOTTOM EXIT.

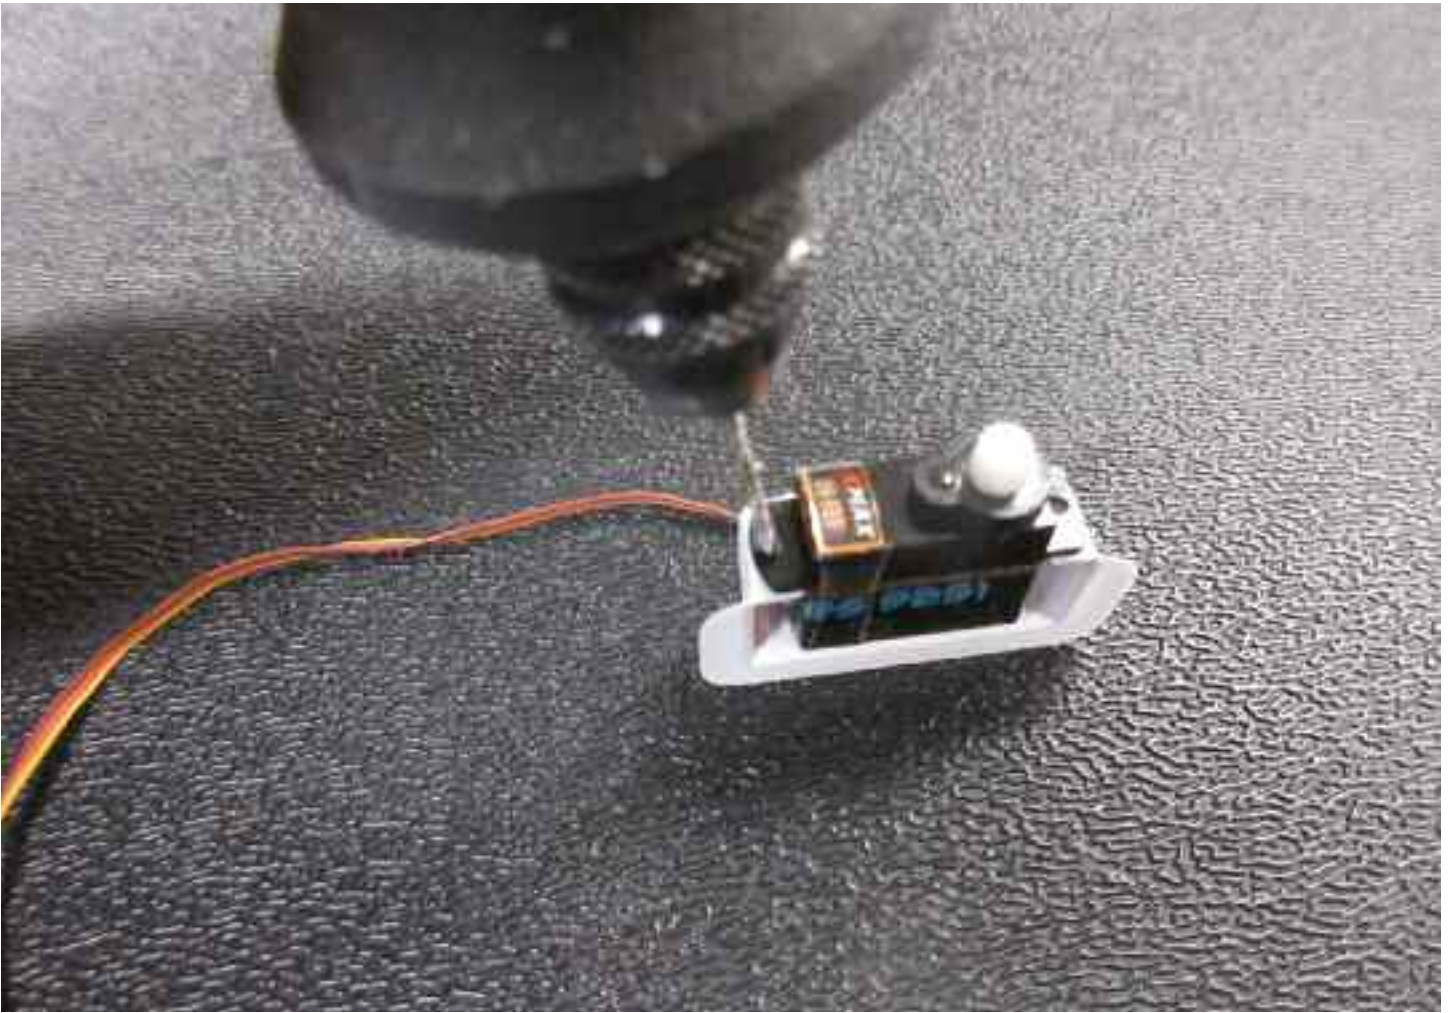

USE A 3/64" DRILL BIT ON LOW SPEED TO OPEN
PILOT HOLES FOR SERVO MOUNTING SCREWS.
INSTALL SCREWS. DO NOT OVER TIGHTEN.



PREPARE SERVO CONTROL HORN. REMOVE OUTER PORTION, ROUND OVER AND OPEN CONTROL ROD HOLE WITH 1/16" DRILL BIT.

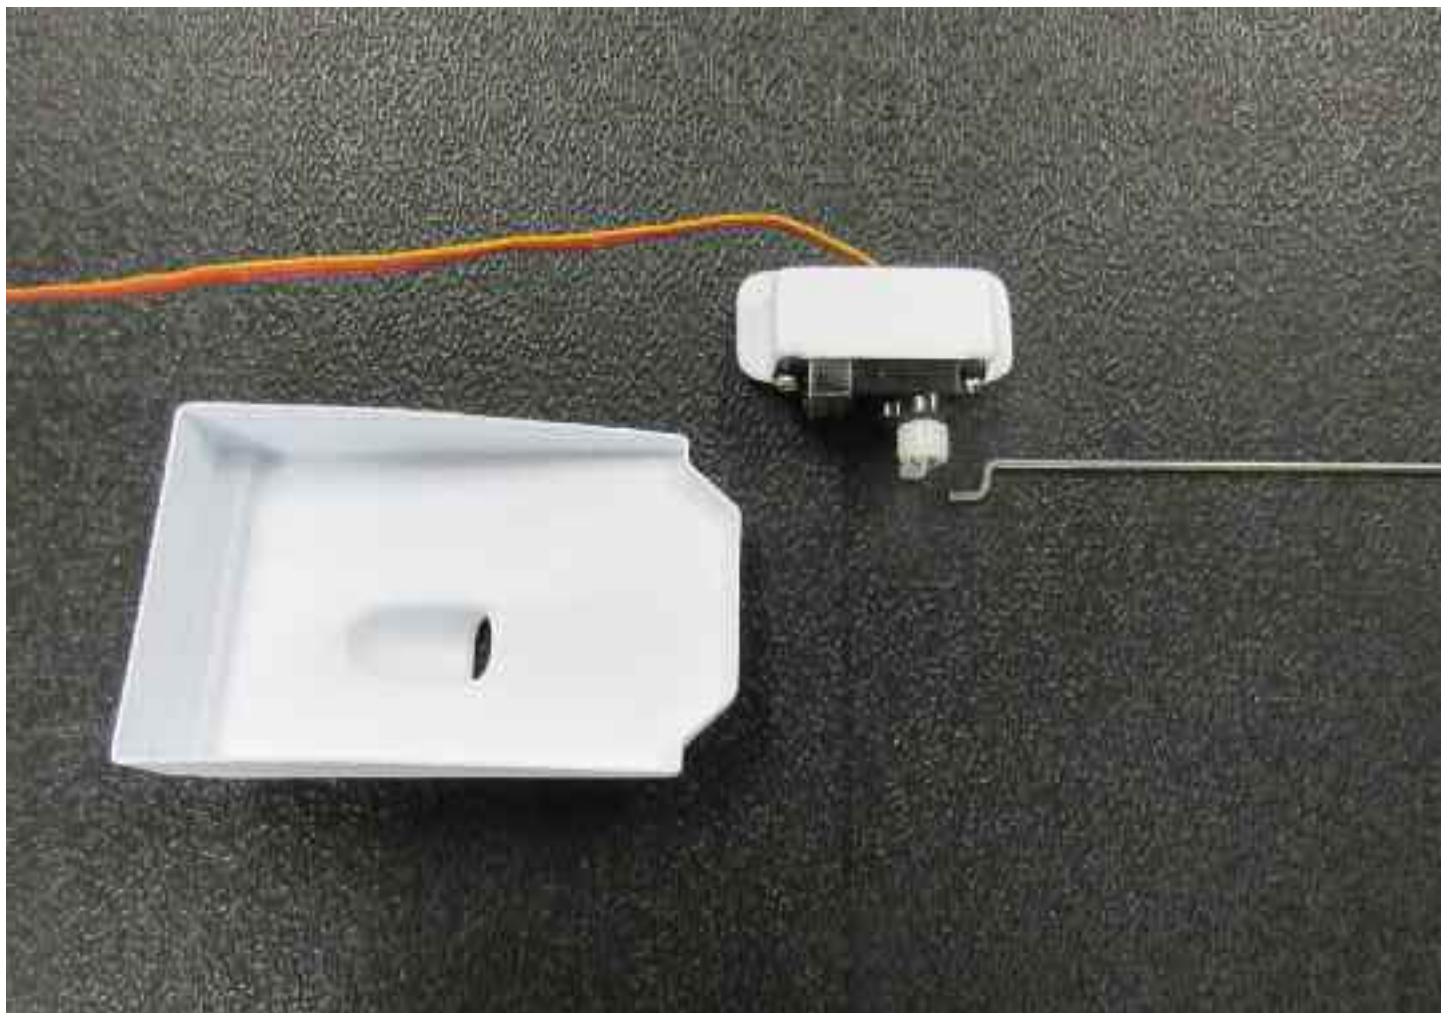


INSTALL SERVO CONTROL HORN. NOTE ORIENTATION
OF ALL PARTS. THIS IS FOR RIGHT HAND WING PANEL.
MIRROR FOR LEFT HAND WING PANEL.



LOCATE AILERON CONTROL RODS SUPPLIED IN
WILLYNILLIES.COM AIRPLANE KIT.
RIGHT HAND CONTROL ROD SHOWN.
BEND OUTERMOST LEG OF CONTROL ROD
UP TO FORM 90° ANGLE. RIGHT AND LEFT
CONTROL RODS SHOULD BE A MIRROR IMAGE.
AILERON CONTROL ROD PATTERN CAN BE
FOUND AT WILLYNILLIES.INFO.




CONTROL ROD BENT AND INSTALLED FOR
RIGHT HAND WING PANEL APPLICATION.
MIRROR FOR LEFT HAND WING PANEL.
THIS UPWARD BEND WILL AID IN INSTALLATION
AND REMOVAL OF ASSEMBLED WING SERVO HOUSING.

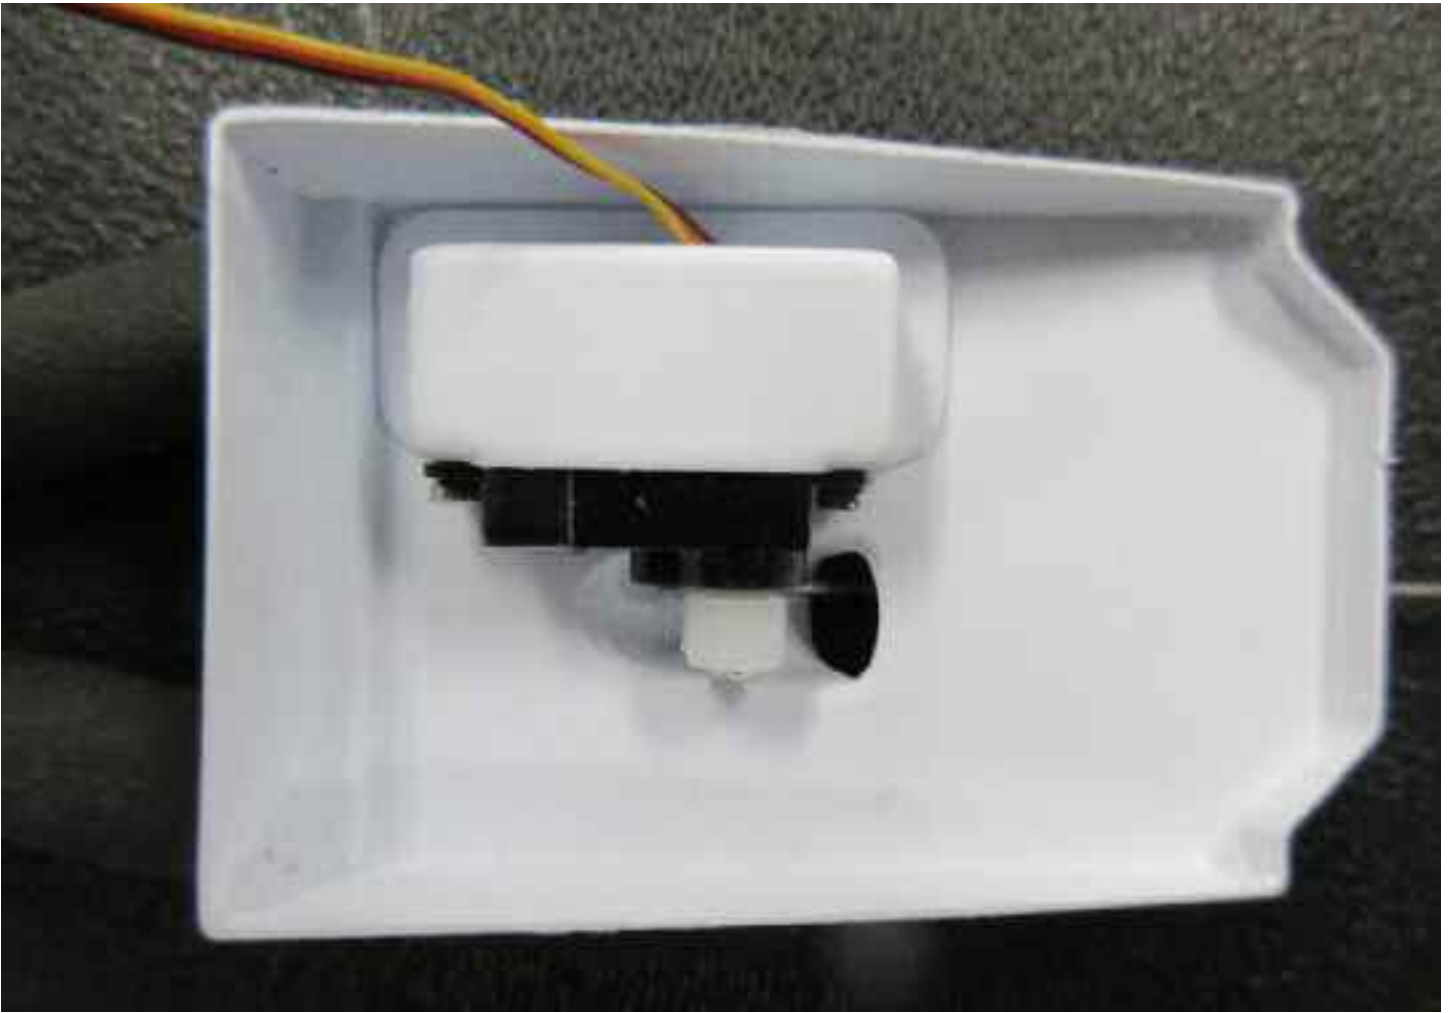


SERVO MOUNT FLANGE WILL PROPERLY
LOCATE SERVO IN HOUSING. SERVO MOUNT FLANGE
SHOULD BE AGAINST OUTER AND FOREMOST EDGES.




APPLY MEDIUM CA TO SERVO MOUNT FLANGE.
INSTALL IN HOUSING.

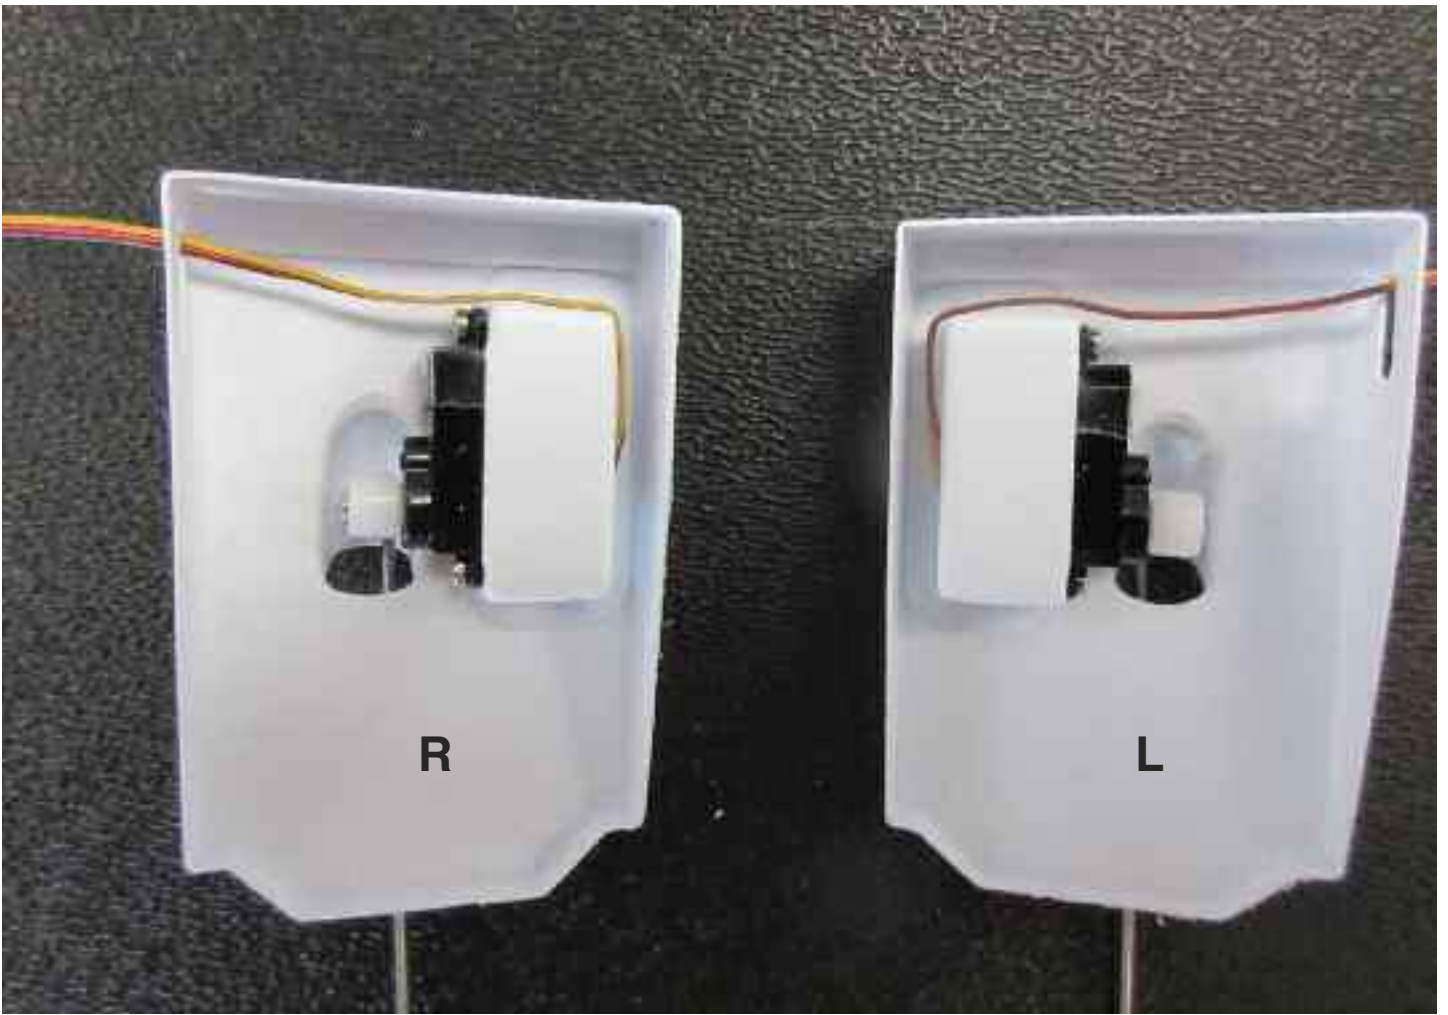

COMPLETED WING SERVO MOUNT HOUSING PAIR.

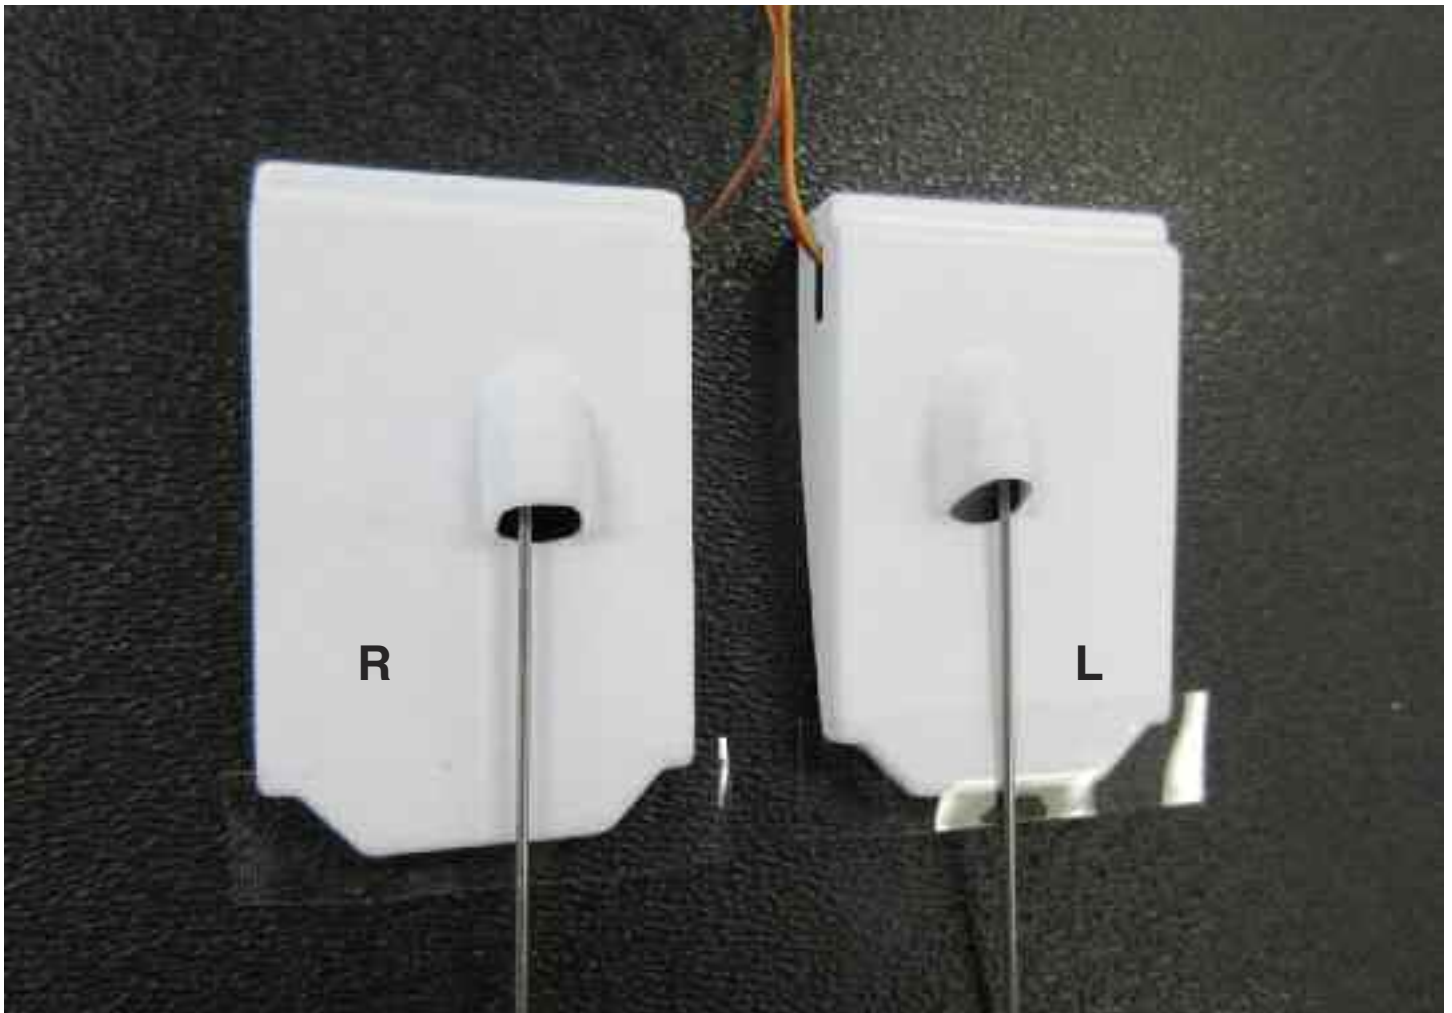

INSTALL WING MOUNT SERVO
HOUSINGS INTO WING. SECURE AT
TRAILING EDGE WITH HIGH STRENGTH
CLEAR TAPE.

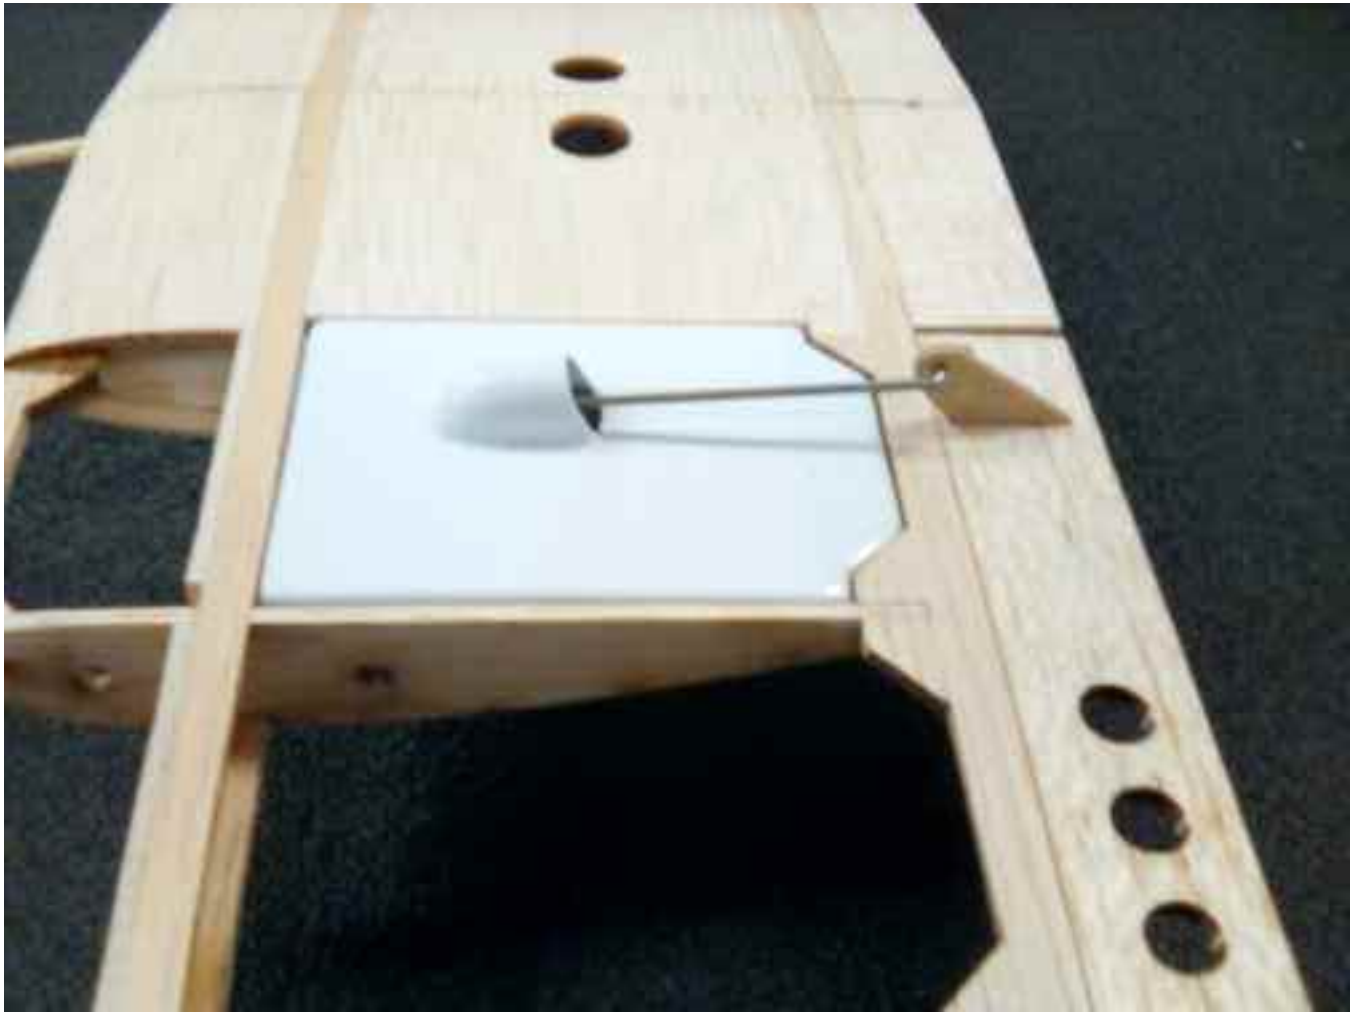

WING SERVO MOUNT INSTALLED.

YOU WILL CERTAINLY APPRECIATE THE SPEED
AND EASE OF INSTALLATION, AND THE ABILITY TO
REMOVE AND REPLACE SERVOS IF THE NEED ARISES.

PLEASE GIVE US YOUR FEEDBACK AT WILLYNILLIES.COM.

THANK YOU!